



\*Version 2019

**Premium Steel Roofing Tiles for an elegant finish, modern look and unrivalled durability from Mabati Rolling Mills Limited**






**Orientile** combines the exotic aesthetic of the orient with the widest coverage for economy and practicality. The shape is the embodiment of grace and distinction. A very popular modern day choice Orientile is an aesthetically pleasing steel sheeting profile that gives the look of an exotic tile finish.

## Specifications

- Overall Cover width: 1,130mm +/- 5mm
- Effective cover width: 1,060mm +/- 5mm
- Length/Square Meter: 963mm

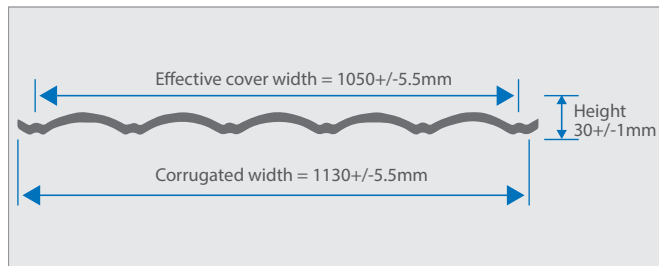

- Lengths: 600mm upwards in multiples of 300mm
- Maximum recommended length for 0.32mm is 6m
- Base material: ZINCAL® coils made using world class patented metal coating technology
- Paint systems: Color Plus Textured and optima
- Finish: Gloss or Textured
- Thickness: 0.32mm, 0.4mm, 0.5mm, 0.6mm (+/- 10%) Minimum 0.3mm(28g)
- Maximum: 0.60mm (22g)

## Material options

- Aluminium- Zinc: Gauge (mm) AZ85, AZ100-AZ150  
0.32 0.40 0.50 0.60

Orientile is rolled in soft material only- G275

- Input coil width: 1220mm
- Profiled sheet width (overall width): 1130mm
- Rib to Rib width i.e.: Pitch: 210mm
- Depth of each tile (Step to Step): 300mm
- Effective cover width: 1050mm
- Purlin spacing: 600mm

## Roof pitch

Orientile can be used on a roof pitched from as low as 15degrees

## Purling spacing


Battens / purlins should be spaced at 300mm on both ridge and eave (i.e.: at every tile step), and at maximum 600mm (i.e.: at every second tile step) internal spans, although battens at every step will be stronger

## Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris

## Features:

- Sheets
  - Continous length profile increases visual uniformity
  - Reduces chance leakage
  - Lightweight safer to lift and install while enabling the supporting structure to be less bulky/costly
- No underlays needed
- Rapid roof coverage
  - Large panel size enables roofing to be completed faster
  - Easy and secure - roofing sheets are fixed to the roof structure
- World class patented coating technology
- MRM Mark of Quality - each sheet is inspected over 6 times before dispatch
- Engineered to prevent leakage by capillary action

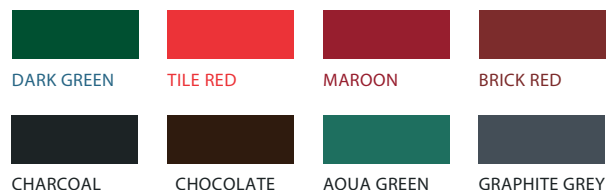

### NAIROBI

Old Mombasa Road  
Cell: +254 788 202020/ 735511180  
Email: marketing.mrmroofing@safalgroup.com

### MARIAKANI

Mariakani  
Cell: +254 722 205396 / 722 205397  
Email: mrmcoils@safalgroup.com

### MOMBASA

Mombasa-Malindi Highway,  
Cell: +254 733 474 766  
Email: mombasa.mrmroofing@safalgroup.com

### KISII

Industrial Area Road, Daraja Mbili,  
Cell: +254 718215659  
Email: kisii.mrmroofing@safalgroup.com

### THIKA

Kiboko Road  
Cell: +254 780 909030  
Email: thika.mrmroofing@safalgroup.com

### KISUMU

Sabuni Road, Industrial Area  
Cell: +254 733 600 150  
Email: kisumu.mrmroofing@safalgroup.com

### ELDORET

Kapsoya, Uganda Road  
Cell: +254 780909040  
Email: eldoret.mrmroofing@safalgroup.com

### NYERI

Nyeri-Nyahururu Road,  
Cell: +254 738887790  
Email: nyeri.mrmroofing@safalgroup.com

### NAKURU

Nairobi-Nakuru Highway,  
Cell: +254 738865980  
Email: nyeri.mrmroofing@safalgroup.com

### KITENGELA

Kitengela MRM Showroom  
Nairobi- Namanga Road  
Cell: +254 708593691  
Email: mrmroofing.kitengela@safalgroup.com

**Toll Free Number: 0800 722 711**