

PIERCED FIX FLASHINGS AND CLOSURES

Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.

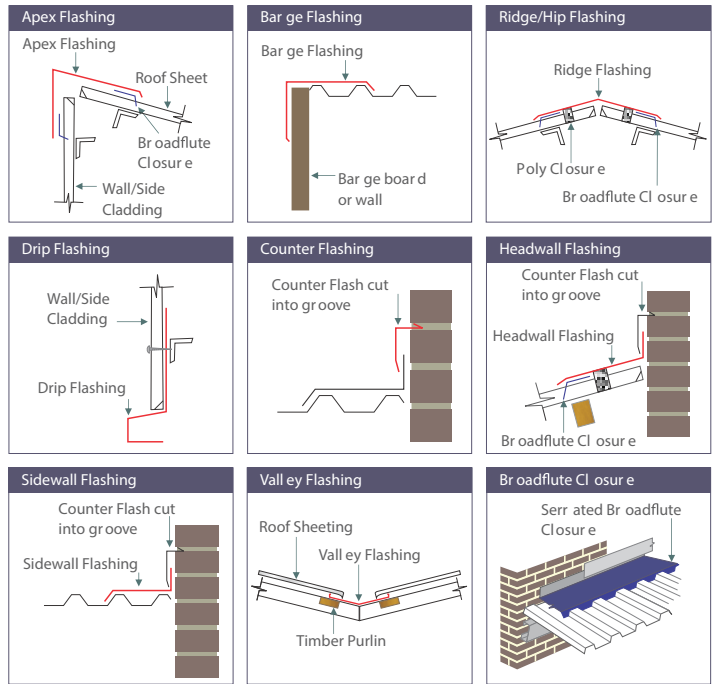
Industrial and commercial flashings tend to be functional more than aesthetic, and ALAF Limited makes a range of standard flashings, which are suitable for this purpose.






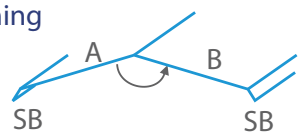
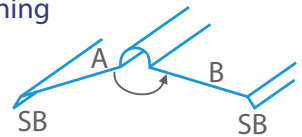
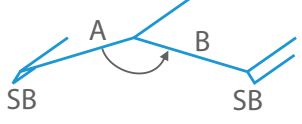
Residential flashings however, usually have an important aesthetic role, which necessitates that they are designed for the structure in question.

ALAF Limited is able to produce most custom designed flashings for residential and other applications- please ask your local branch for more information.











Flashings are usually made in the same material as the roof, for colour matching. ALAF flashings are offered in Aluminium-Zinc coated steel and Aluminium.

Please speak to our flashings departments for further guidance and technical assistance



PIERCED FIX				
Apex Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	As required		
	Girth	462	462	462
Barge Flashing 	Dimensions (A x B)	231 x 231	217 x 245	231 x 231
	Angle	90°	90°	90°
	Girth	462	462	462
Ridge Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°
	Girth	462	462	462
Roll Top Ridge Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°
	Girth	462	462	462
Hip Cap 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	128°	128°	128°
	Girth	462	462	462

PIERCED FIX FLASHINGS AND CLOSURES

PIERCED FIX		tekdek	MaxCover	classiCORR corrugated
Broad Flute Closure		Length of closure 686	N/A	N/A
Drip Flashing		Dimensions (A x B x C x D)	60 x 50 x 20 x 24	111 x 60 x 25 x 35
		Angle	92°	92°
		Girth	154	231
Counter Flashing		Dimensions (A x B)	30 x 112	30 x 112
		Angle	(i)22.5° (ii)88°	(i)22.5° (ii)88°
		Girth	154	154
Headwall Flashing		Dimensions (A x B)	75 x 231	75 x 231
		Angle	90°	90°
		Girth	308	308
Side Wall Flashing		Dimensions (A x B)	77 x 221	63 x 245
		Angle	90°	90°
		Girth	298	308
External Corner		Dimensions (A x B)	231 x 231	231 x 231
		Angle	90°	90°
		Girth	462	462
Internal Corner		Dimensions (A x B)	231 x 231	231 x 231
		Angle	90°	90°
		Girth	462	462
Vall ey Flashing		Dimensions (A x B)	231 x 231	231 x 231
		Angle	128°	128°
		Girth	462	462
Roll Top Vall ey Flashing		Dimensions (A x B)	231 x 231	231 x 231
		Angle	140°	140°
		Girth	462	462
Under-Over Flashing		Dimensions (A x B)	150 x 287	150 x 287
		Angle	128°	128°
		Girth	437	437

All dimensions given in millimetres