


A perfect blend of Harmony and Style



**Versatile.
Now available
in Matt finish.**

Available Colours



Sky Blue




Brick Red



Tile Red



Dark Green



Charcoal Grey



Potters Clay



A member of the



PRODUCT DESCRIPTION & FEATURES

VERSATILE Nuvo is a premium roofing profile from ALAF LIMITED that has the appearance of tiles but the strength and light weight advantage of steel. It is available in a range of colours and in various thicknesses. Local manufacture ensures that Versatile is available in even the smallest quantities, and is a cut to length profile.

All this highlights VERSATILE Nuvo as a lightweight, durable and beautiful product that is ideal for the most discerning user.


ROYAL VERSATILE is the matt finish version of Versatile Nuvo.

PROFILE SPECIFICATION


In feed strip width	1220
Pitch - mm	203
No. of troughs	5
Effective cover width - mm	1015
Coverage - %	83.10
Recommended	AZ
Material & Thickness	0.30 - 0.40 T CT: CQ Yield Strength 300 Mpa

The sheeting shall be VERSATILE profile as manufactured by ALAF Limited. The profile shall be roll-formed with 6 large corrugation at 203mm, centres with a net cover of 1015mm. The rib height shall be 28mm and shall be fixed in accordance with the manufacturer's recommendations.

PROFILE DRAWING



TROUGH DETAIL

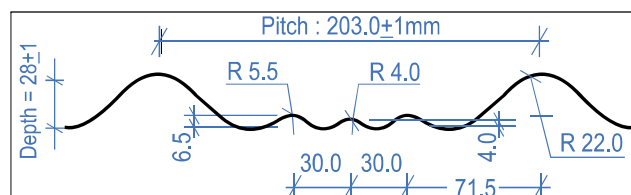


MATERIAL OPTIONS


Aluminium - Zinc	Gauge (mm)	
AZ100 G300 Pre-painted	0.30	0.40

Other gauge are available on special request
AZ 150 G300 Pre-painted available on special request

TILING PROCEDURE

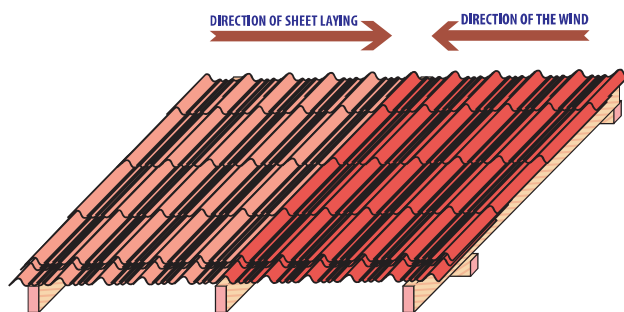

CREST FIXING



Note: - VERSATILE are fixed by drilling fasteners through its crest. It is recommended to use minimum 3 fasteners across each width of the profile (both ends at the overlap and center). Recommended to use self drilling screw with EPDM washer conforming to AS 3566 class 3-4.

PURLIN SPACINGS

Purlin Spacings are dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m²) for your particular application.


GAUGE	0.30mm	0.40mm
MATERIAL	ALUMINIUM - ZINC	ALUMINIUM - ZINC
ROOFS	mm	mm
Internal Span	800	1 000
End Span	600	800
Cantilever (Unstiffened)	200	200
Cantilever (Stiffened)	300	300
SIDE CLADDING		
Single Span	1 100	2 100
End Span	1 000	2 400
Cantilever	200	200
Approximate Mass/m ²	2.35kg	3.09kg

LENGTHS & ROOF PITCH

VERSATILE Nuvo can be used on roof pitch from minimum 7.5° where single lengths are used and 10° if end laps are used.

TOLERANCES

A length variation range of +/-5,0mm, and width tolerance of +/-3,0mm are permissible

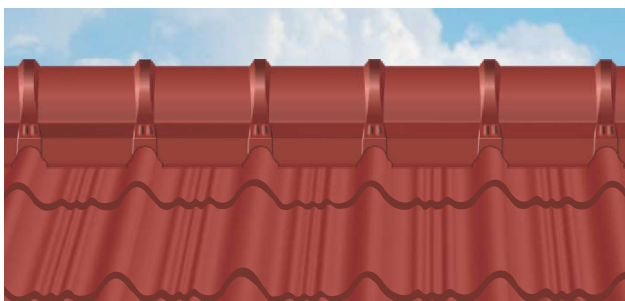

ROLL TOP RIDGES

VERSATILE Nuvo is sold as a complete system, with its own distinctive roll top ridges which are designed to complement the profile. The roll top ridge is notched, to allow it to be bent into the tiles as a closure.

NOTE: The ridges have matching notches on either side.